

LR-10K-TLPAD

Low-Rise, Commercial Pad Lift 10,000 lbs. Capacity

The *IDEAL LR-10K-TLPAD* is a 10,000 lb. low rise, high-performance commercial, vehicle frame contact lift designed for Cars, SUVs, Vans & Trucks. The LR-10K-TLPAD Pad Lift includes the latest in design & safety features including, twin hydraulic cylinders, three locking height positions with dual latch releases, durable rubber contact pads, protective hose covers and outer drive-over fixed platform frame allowing for wheel service repairs for a wider range of vehicles, including uni-body vehicles using the included multi-height adapters and rubber pads. The versatility of the pad lift design allows vehicles to be driven-on the pad lift in either direction, while also having the ability to position the hose & power unit to either side of the pad lift, allowing for the best fit in a shop or garage. Easy lift operation is provided with high quality electric / hydraulic 115V DURO power unit, mounted to a pedestal post combined with dual point manual lock release. Optional 220V DURO power unit is also available for faster speed of rise.

Features

- 10,000 LBS CAPACITY
- LOW RISE, COMMERCIAL GRADE PAD LIFT
- IDEAL FOR EXPRESS TIRE & WHEEL SERVICE
- SURFACE MOUNT INSTALL CONFIGURATION
- INTEGRATED OUTER FRAME & RAMPS PROVIDE DRIVE-ON & OFF CLEARANCE FOR WIDE VEHICLES
- LATCH RELEASE HANDLES ON EACH SIDE OF LIFT
- DUAL HYDRAULIC LIFT CYLINDERS
- DIAMOND PLATE RAMPS
- DURABLE RUBBER PLATFORM CONTACT PADS
- 3 LOCKING HEIGHT POSITIONS
- METAL HOSE COVERS 55"L (2EA)
- STANDARD (4EA) HD MULTI-POSITION HEIGHT ADAPTERS & (4EA) 1.5" RUBBER PADS
- POWER UNIT PEDESTAL STAND
- DURABLE POWDER COAT FINISH
- OPTIONAL 220V POWER UNIT FOR INCREASED LIFT SPEED



Specifications

Lift Model	LR-10K-TLPAD
Capacity	10,000 lbs.
Overall Length	91"
Overall Width	88-5/8"
Max Rise Height	22-1/2"
Min Lift Height	4-1/4"
Max Lift Height w/ Tall Adapter	30-3/4"
Platform Pad Length	51-1/4"
Platform Pad Width	24"
Platforms Outer Width	70-3/4"
Platforms Forward Movement	15"
Platforms Locking Heights	13.5", 17.25", 21.5"
Lift Speed 115V / 220V	60S / 36S
Power	115V - 20 Amp - 1PH
Ship Weight	1,262 lbs.

Optional Upgrade DURO 220V Power Unit

- On Average, provides 40% Faster Speed of Rise at 36S.
- Electrical Plug not provided.
- Requires Electrical Service to Breaker.



(PU-220V-L-H-X)



LR-10K-TLPAD

More Features, More Value!!

**HIGH PERFORMANCE, COMMERCIAL LOW-RISE PAD LIFT
10,000 LB. CAPACITY**

DURO
HYDRAULICS

**115V POWER UNIT
& PEDESTAL STAND**

**METAL HOSE
GUARDS INCLUDED
(NOT SHOWN)**

**DURABLE
POWDER COAT
FINISH**

**DUAL
HYDRAULIC
CYLINDERS**

**DIAMOND
PLATE RAMPS**

**LATCH RELEASE
HANDLES ON
EACH SIDE OF LIFT**

**QUICK & EASY
SURFACE MOUNT INSTALLATION**

**DURABLE RUBBER
CONTACT PADS**


**INTEGRATED
OUTER FRAME
& RAMPS**

**3 LOCKING
HEIGHT
POSITIONS**

**HD MULTI-POSITION
HEIGHT ADAPTERS
& RUBBER PADS**

**HYDRAULIC HOSE & POWER UNIT CAN CONVENIENTLY BE
ROUTED & INSTALLED TO EITHER SIDE OF PAD LIFT**

**TWO 55"
METAL HOSE
GUARDS**

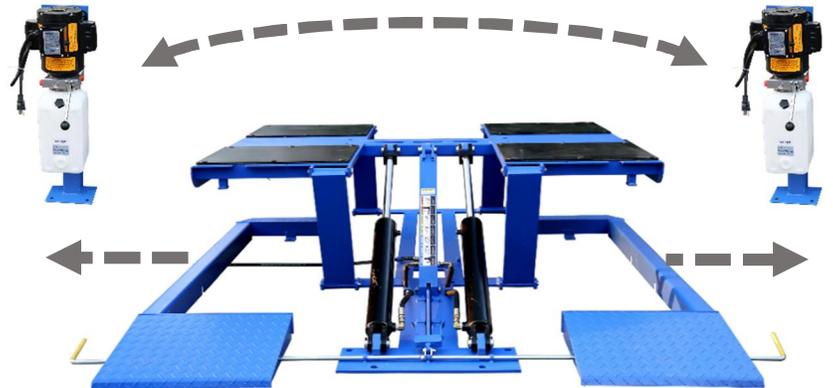

LR-10K-TLPAD



8320 E. Hwy 67
Alvarado, TX 76009

Premium Products at Affordable Prices!!

Phone: 877-558-9337

Fax: 817-558-9740

www.idealautoequip.com



IDEAL LR-10K-TLPAD (JAN 2024)