

TP9KACX, TP9KSCX & TP9KFX
9,000 lb. Clear Floor & Floor Plate
Two Post Asymmetric & Symmetric

Introducing the New TP9K 'X' Series Two Post Lifts!! The new TP9KACX, TP9KSCX & TP9KFX Two Post, Clear Floor & Floor Plate Lifts have been redesigned to now include standard features with Single Piece Column construction, Internal Hose routing, Padded Overhead Shut-Off Bar with Kill Switch, Reduced overall Width, Drop-In Adjustable Swivel Pads with Height Adapters & Rubber Door Guards, making these models one of the best Two Post Lift values in the industry!



New Design & Features...
For the Best Two Post Lift
Value in the Industry!!


Standard Features:

- High Quality Construction
- Chain Drive
- Dual Point Lock Release
- Saddle Pad Adapters included (1 pair)
- Powder coat finish

New TP9K "X" Features:

- Single Piece Column construction (TP9KACX - TP9KSCX)
- Padded 'Shut Off' Bar w/Kill Switch (TP9KACX - TP9KSCX)
- Low Profile 'drop-in' Swivel Pads w/ 1-1/2" adjustable height
- 4ea Stackable 1-3/8" & 4" 'drop in' Height Adapters
- Reduced overall Width w/ front-side Power Unit Mounting
- Internal Hose Routing w/ integrated Hose Guards
- Rubber Door Guards

TP9KACX, TP9KSCX & TP9KFX
9,000 lb. Clear Floor & Floor Plate
Two Post Asymmetric & Symmetric

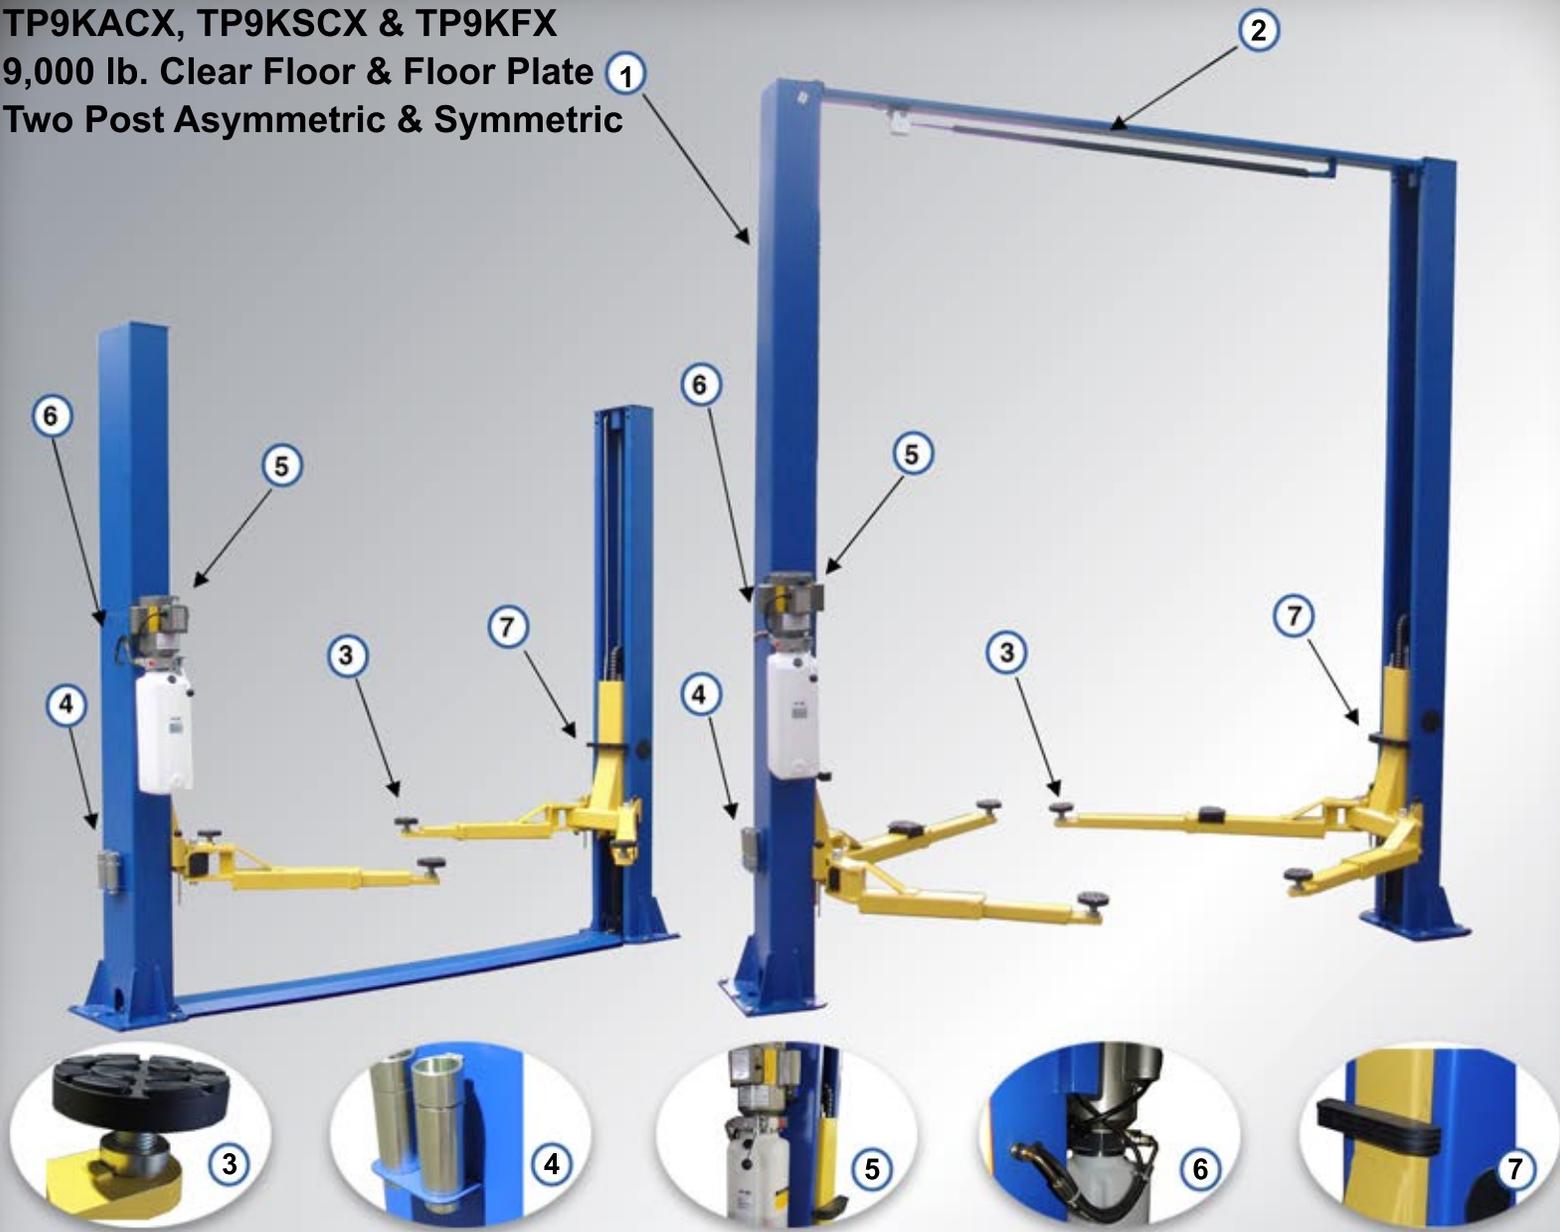

New!! TP9K "X" Series updated Design & Features

- ① Single Piece Column construction
- ② Padded 'Shut-Off' Bar w/ Kill Switch
- ③ Low Profile 'drop-in' Swivel Pads w/ 1-1/2" adjustable height
- ④ 4ea Stackable 1-3/8" & 4" 'drop-in' Height Adapters
- ⑤ Reduced overall Width w/ front-side Power Unit mounting
- ⑥ Internal Hose Routing w/ integrated Hose Guards
- ⑦ Rubber Door Guards

| Specifications | TP9KACX | TP9KSCX | TP9KFX |
|-----------------------------|-------------------|-------------------|-------------------|
| Lifting Capacity | 9,000 lbs. | 9,000 lbs. | 9,000 lbs. |
| Height Overall | 142.9" | 142.9" | 111.9" |
| Width Overall w/ Power Unit | 138" | 138" | 134.6" |
| Max Lifting Height | 72" | 72" | 72" |
| Width Between Columns | 113.6" | 113.6" | 110.4" |
| Min Pad Height | 4" | 4" | 4" |
| Drive Thru Clearance | 96" | 104" | 101" |
| Lifting Speed | 50S | 50S | 50S |
| Asymmetric / Symmetric | Asymmetric | Symmetric | Symmetric |
| Clear Floor / Floor Plate | Clear Floor | Clear Floor | Floor Plate |
| Front Arm Reach – Min / Max | 29" – 41" | 31" – 45" | 31" – 45" |
| Rear Arm Reach – Min / Max | 37" – 57" | 31" – 45" | 31" – 45" |
| Max Load Per Arm | 2,250 lbs. | 2,250 lbs. | 2,250 lbs. |
| Cable Diameter | 3/8" | 3/8" | 3/8" |
| Column Size | 7.25" x 10.87" | 7.25" x 10.87" | 7.25" x 10.87" |
| Column Steel Thickness | 5mm | 5mm | 5mm |
| Carriage Steel Thickness | 5mm | 5mm | 5mm |
| Arm Steel Thickness | 6mm | 6mm | 6mm |
| Power | 220V-20 Amp, 1 PH | 220V-20 Amp, 1 PH | 220V-20 Amp, 1 PH |
| Ship Weight | 1,370 lbs. | 1,370 lbs. | 1,265 lbs. |

Optional Accessory:

TP9KX-SPNCA
 Spin Up Cradle Adapter, TP9KX (4 Ea)

